



# 515PV

15 Amp, 125 Volt, NEMA 5-15P, 2-Pole, 3-Wire Plug, Straight Blade, Rubber, Yellow

15 Amp, 125 Volt, NEMA 5-15P, 2-Pole, 3-Wire, Plug, Straight Blade - Yellow

**ROHS Compliant** : Yes

## Technical Information

### Electrical Specifications

**Amperage** : 15 A

**Current Interrupting** : Certified for current interrupting at full rated current

**Dielectric Voltage** : Withstands 2000V per UL498

**Grounding** : Grounding

**Pole** : 2

**Temperature Rise** : Max 30C after 50 cycles OL at 150 percent rated current

**Voltage** : 125 VAC

**Wire** : 3

### Material Specifications

**Assembly Screws** : Steel, Zinc Plated

**Blades/Contacts** : Brass

**Body Material** : PVC

**Color** : Yellow

### Product Features

**Color** : Yellow

**Cord Range** : .245 - .655

**Grade** : Residential

**NEMA** : 5-15P

**Series** : 515PV

**Standards and Certifications** : UL/CSA

**Wire Gauge** : 18-12 AWG

### Environmental Specifications

**Flammability** : Rated V-2 per UL 94

**Operating Temperature** : -40° C to 60°C

### Mechanical Specifications

**Cord Range** : .245 - .655

**Product ID** : Ratings and NEMA I.D. permanently marked on device

**Terminal Accom.** : 18-12 AWG

**Terminal ID** : Brass-Hot, Green-Ground, Silver-Neutral

### Standards and Certifications

**ANSI** : C-73

**CSA C22.2 No. 42** : File LR-406

**NEMA** : WD-6

**NOM** : 057

**UL498** : File E13393

**Warranty** : 2-Year Limited

**Color** :  Yellow

**UPC Code** : 078477841242

**Country Of Origin** : Mexico

**NEMA** :  5-15P


### Available Colors :

  
Orange

## Features and Benefits

- Hinged design provides fast, easy assembly
- Ideal for replacement of plugs on tools, appliances and extension cords
- Accepts AWG SJ 16/3
- NEMA 5-15P
- Available in Black, Gray, Orange and White
- cULus, NOM
- Rugged PVC plug and connector (515PV/515CV) resists moisture and chemicals
- Unique dimpled body provides a secure hinge grip
- Built-in cord grip adjusts automatically for use with 18-12 AWG.

## Wiring Diagram

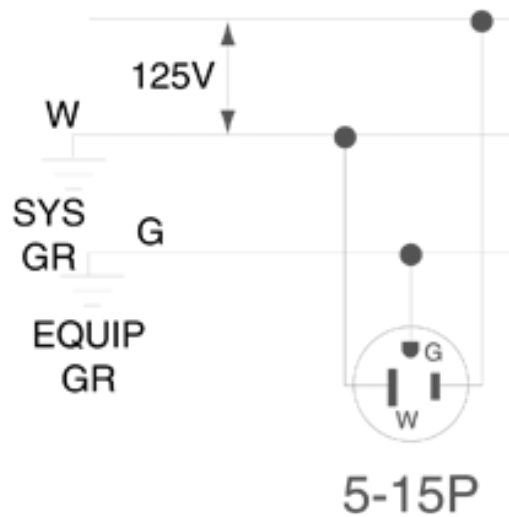

### SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

#### Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

#### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

#### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 ·

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/company/about-leviton/locations](http://www.leviton.com/company/about-leviton/locations)

© 2026 Leviton Manufacturing Co., Inc.