


RDM428, Aluminum - Multiple Outlet Connector (RDM Mole)

By Burndy
Catalog # [RDM428](#)

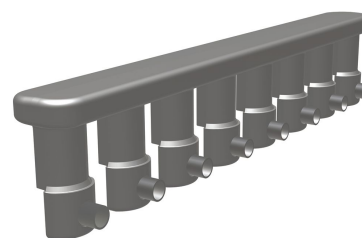

URD Mole, #4 Str. - 250 kcmil Al or Cu 300 kcmil - 350 kcmil, 600 Volt Rating, 5.81 in L

Features

- Type RDM-28 MOLE connectors are an economical, insulated, submersible service junction suitable for direct burial or for use in enclosures
- Disconnectable Joints allow additions of new services without disturbing previous installations
- Taping is eliminated, Heat Shrink or Force-Fit Rubber Sleeves insulated each joint, Rubber is used to insulate the MOLE body
- Removable sealing covers are supplied on all outlets but two
- REA Listed Tap Kits, including HYLUG, Hardware and Sleeve are ordered separately

Application

For Aluminum And Copper And Direct Burial Or For Use In Enclosures

Specifications

Buy American Compliant	Contact Manufacturer
Certification - cULus	No
EU RoHS Indicator	Contact Manufacturer
Certification - UL Recognized	No
Certification - ETL	No
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	No
UL Listed	No
Buy America(n) Qualified	Contact Manufacturer

Conductor

Conductor - Copper Str Size	<ul style="list-style-type: none"> • 4 AWG • 3 AWG • 2 AWG • 1 AWG • 1/0 • 2/0 AWG • 3/0 AWG • 4/0 AWG • 250 kcmil
Conductor - Copper Str Size Range	4 AWG-250 kcmil
Conductor - AL Str Size	<ul style="list-style-type: none"> • 4 AWG • 3 AWG

- 2 AWG
- 1 AWG
- 1/0 AWG
- 2/0 AWG
- 3/0 AWG
- 4/0 AWG
- 250 kcmil
- 266 kcmil
- 300 kcmil
- 336 kcmil
- 350 kcmil

Conductor - AL Str Size Range 4 AWG-350 kcmil

Configuration

Number Of Outlets	4
Connector Type	Tap

Dimensions

Package Length	6.100 in
Package Width	4.550 in
Package Weight	3.030 lb.
Package Height	2.850 in
Dimension - Length Overall	5.81 in
inch	

General

Sub Brand	URD MOLE
Insulation Type	Rubber
Trade Name	MOLE™
Insulation	Y
Type	RDM-28
UPC 12 Digit	781810180006
UPC 14 Digit GTIN	00781810180006
Material	Aluminum Alloy
UPC	781810180006

Logistics

Minimum Pack Quantity	1
Carton Quantity	12
Pallet Quantity	816

Product Assets

[Catalog \[English\]](#)